

The C7 Floor Standing Public Terminal is made for the most elegant of public environments.



Copyright 2009 Zivelo Corp ZC709R1.1.26




**ZIVELO™**

**C7**

# C7 Specifications

Body	<p>Material: 5052 Aluminum          Thickness: 10 Gauge / 0.100" / 2.5mm          Welding: Tig with Anodizable Rod          Cut Type: Laser and CNC Turret          Bend Radius: 0.41" / 1.03mm          Finishing: Electrostatic Powder Coating, Class A Finish</p>
Poles	<p>Material: 6063 T6 Aluminum          Thickness: 8 Gauge / 0.125" / 3.2mm          Welding: Tig with Anodizable Rod          Cut Type: CNC Machined          Curve Radius: 0.63R          Finishing: Electrostatic Powder Coating, Class A Finish</p>
Display	<p>Type: LCD          Size: 19" Diagonal          Aspect Ratio: 4:3          Resolution: 1280 X 1024 (75Hz)          Brightness: 300cd/m2 (nit)          Contrast: 800:1          Response Time: &lt;5ms          Viewing Angle: 160 Horizontal and Vertical          Color Support: 24 Bit (16.7M Colors)          Max Sync Rate: 76Hz X 81kHz          Signal Input: VGA          Dot Pitch: 0.294mm          Power: 120/230VAC</p>
Sound	<p>System: Logitech™ Surround Speaker System, 1 Subwoofer, &amp; 2 Satellites          Features: Integrated Power &amp; Volume Control in Control Base          Power: 17 Watts RMS Power (34 Watts Peak)          Satellite Power: 8 Watts (16 Watts Peak)          Subwoofer Power: 9 Watts (18 Watts Peak)          Freq. Response: 50Hz - 20kHz          Power Cable Length: 5 feet / 1.5 meters          Headphone Jack: 3.5mm          Microphone Jack: 3.5mm</p>
Access	<p>Lock: PIN Code Enabled Electronic Lock with Keypad          Door: Security Door Made of Aluminum With Security Lip on all Sides          Door Hardware: Quick Release Spring Latches          Locking Mechanism: Dual Rotary Latch with Steel Cam and Linkages</p>
Cooling	<p>Fan Type: Tube Axial Fan          Bearings: Sealed          Case: Aluminum          Filter: Metal Mesh Filter (Replaceable)          CFM: 37          Voltage: 115VAC          RPM: 2700          dBA: 33          Vent Holes: Multiple in Cabinet</p>
Power	<p>Type: Ultra Compact UPS System          Power: 180 Watts          Storage: 350VA          Outlets: 6 Powered / 3 Protected          Surge: Yes, Protection          Other: Audible Alarm, Replaceable Battery</p>
Packaging	<p>Style: Corrugated Box with Dual Tray System          Material: Kraft Paper          Rating: 250#          Cushion: 1.75 Poly Ethylene Foam</p>
Environmental	<p>Operating Temp: 30F - 90F (-1C - 32C)          Storage Temp: 10F - 110F (-12C - 43C)          Humidity Range: 10-80%</p>
Compliances	ISO-9001, FCC, UL, CE, ADA, RoHS
Warranty	<p>Cabinet: 5 Years Limited          Electronics: 1 Year Limited          Extension: Options Available</p>

# C7 Dimensions

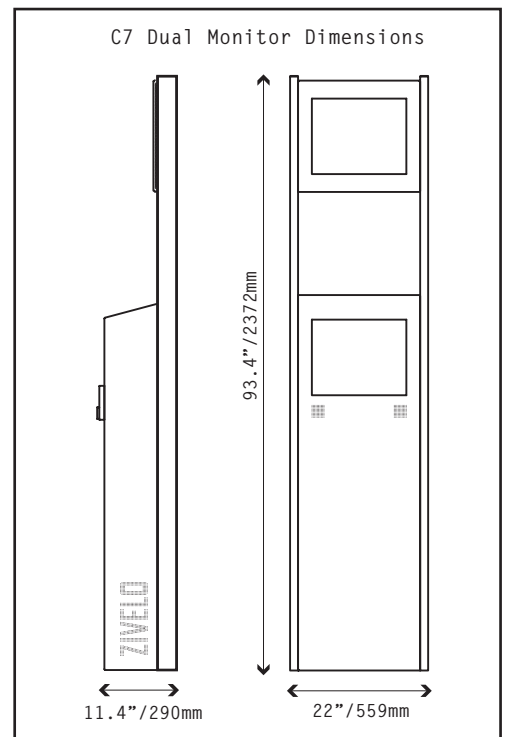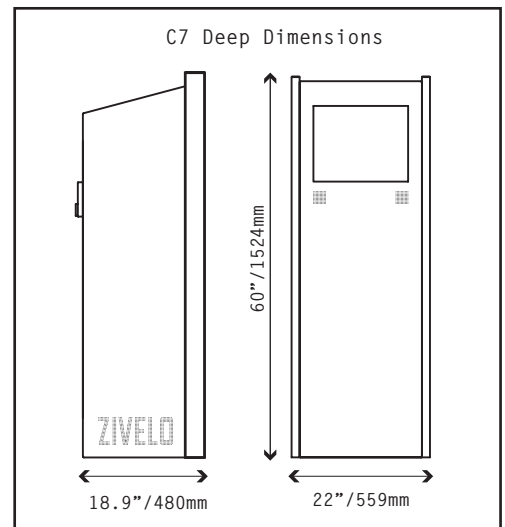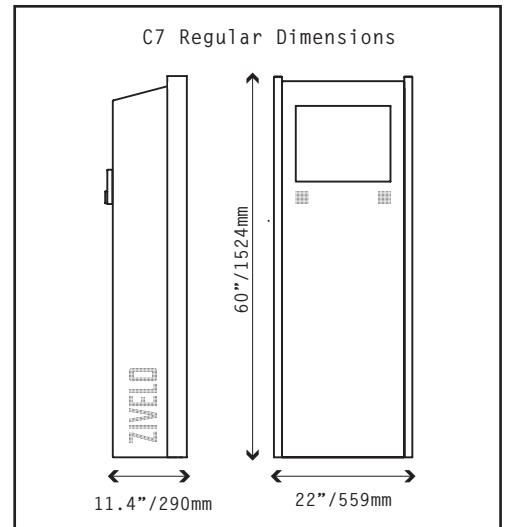

# ZIVELO™